

**GLOBAL FILTRATION CLEAN
TECHNOLOGY (I) PVT. LTD.**




PAINT ARRESTOR

Paint arrestor **GF80**



Paint arrestor **GF60**

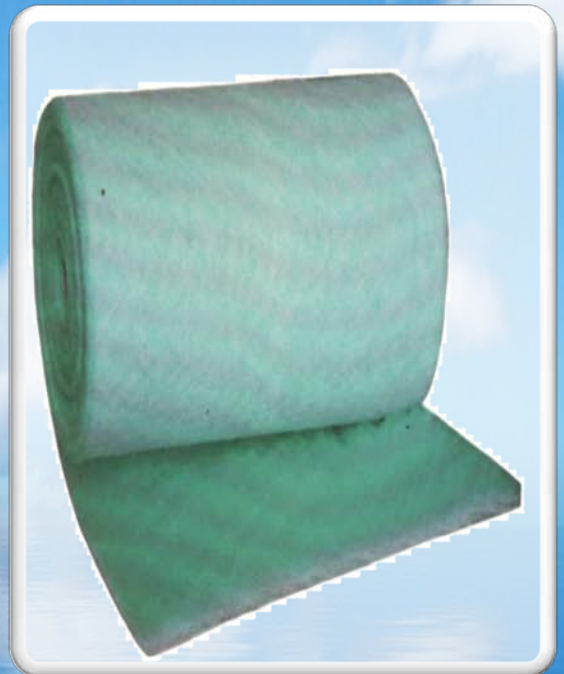

Clean Air Is Our Business



Paint arrestor **GF80**

Progressively density glass fibre filter media impreg-nated throughout with harmless gel especially designed for paint booth spray particles.

Application: Filtration of Solvent /Water based overspray particles in spray-booths of the surface-treatment, air intake system in Gas turbine & Ventilation.

Model	LHY
Weight	330 gr/sqm
Thickness	80mm
Air Flow Rate	3780 m ³ /h
Initial Resistance	16 pa
Final Resistance	250 pa
Arrestance Eff	77.50%
Air Velocity	1.05 m/s
Dust Holding	4340 gr/sqm
Max Temperature	300 ^o C
Filtration Class	G3 (DIN 24185)
Flame Resistance	F-1 (DIN 53438)

Paint arrestor **GF60**

It is made of farmed quartz glass fiber, the fiber is much thinner, and it expands and rebounds quickly and thoroughly. This series is mainly used to absorb the over dissociative particles and decrease and pollution.

Model	LHG
Weight	250 gr/sqm
Thickness	60mm
Air Flow Rate	4230 m ³ /h
Initial Resistance	14 pa
Final Resistance	250 pa
Air Velocity	1.20 m/s
Dust Holding	3540 gr/sqm
Max Temperature	300 ^o C
Filtration Class	G3 (DIN 24185)
Flame Resistance	F-1 (DIN 53438)

Factory & Sales Office: No: 254 A-1, Shed No:1, 3rd Phase, Bommasandra Industrial Area, 560099

Web site: www.globalfiltration.in | E-Mail ID: info@globalfiltration.in |

Landline: 080- 27834462 | Mob: 09480016332