




**GLOBAL FILTRATION CLEAN
TECHNOLOGY (I) PVT. LTD.**

DUAL LAYER GLUE CEILING FILTER

Dual layer glue ceiling filter
with net

Dual layer solid glue ceiling filter
with net TC fabric

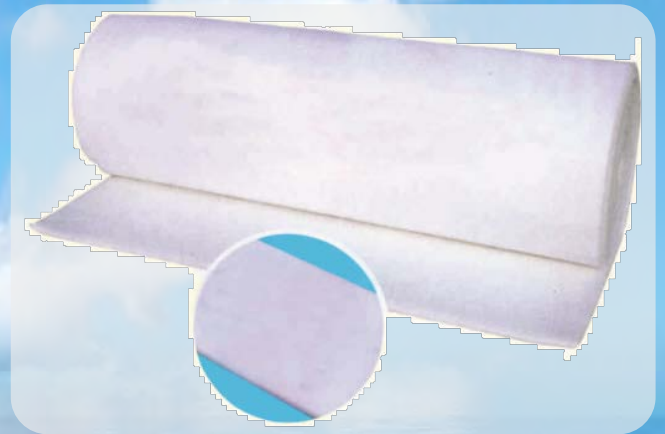

Clean Air Is Our Business



We use the latest technology to manufacture the dual layer glue ceiling filters, the dual layer filters have different filtration results. The larger dust particles are filtered by the first layer and the small particles are filtered by the second layer, the absorptivity and filtration efficiency are increased greatly.

Dual layer glue ceiling filter with net

In order to increase the rate of air flow, we use dual layer filtration materials with different density and high quality water resin, cover super glass fiber net on the filters.

Model	GFC1-600G
Weight	600 gr/sqm
Thickness	22mm
Air Flow Rate	900 m ³ /h
Initial Resistance	26 pa
Final Resistance	98.4%
Air Velocity	0.25 m/s
Dust Holding	475 gr/sqm
Max Temperature	120 ⁰ C
Filtration Class	F-5 (DIN 24185)
Flame Resistance	F-1 (DIN 53438)

Dual layer solid glue ceiling filter with net TC fabric

The filter is covered with TC fabric, the unique double-layer structures make the absorptivity and arrestance improved greatly.

Model	GFC2-600G
Weight	600 gr/sqm
Thickness	22mm
Air Flow Rate	900 m ³ /h
Initial Resistance	26 pa
Final Resistance	98.8%
Air Velocity	0.25 m/s
Dust Holding	480 gr/sqm
Max Temperature	120 ⁰ C
Filtration Class	F-5 (DIN 24185)
Flame Resistance	F-1 (DIN 53438)

Factory & Sales Office: No: 254 A-1, Shed No:1, 3rd Phase, Bommasandra Industrial Area, 560099

Web site: www.globalfiltration.in | E-Mail ID: info@globalfiltration.in

Landline: 080- 27834462 | Mob: 09480016332